

SPECIFICATION

ALUMINIUM HOUSING
ALUMINIUM LOUVRE OPTION
ACRYLIC SPREAD LENS OPTION

**FINISH**

ANODISED ALUMINIUM
ANODISED WHITE

KODU

A slender T5 pendant luminaire with aluminium louvre or spread lens. Available in single and double lengths.

REFERENCE	LAMPS	LENGTH (mm)
SINGLE LENGTH VERSIONS		
KDO 190 114	1 x 14 watt T5	900
KDO 190 121	1 x 21 watt T5	1180
KDO 190 124	1 x 24 watt T5	900
KDO 190 128	1 x 28 watt T5	1600
KDO 190 135	1 x 35 watt T5	1900
KDO 190 139	1 x 39 watt T5	1180
KDO 190 149	1 x 49 watt T5	1900
KDO 190 154	1 x 54 watt T5	1600


NOTE When dimmable control gear is required for the 14, 21, 24 and 39 watt versions, the luminaire length will increase by 250mm.

DOUBLE LENGTH VERSIONS

KDO 190 214	2 x 14 watt T5	1800
KDO 190 221	2 x 21 watt T5	2200
KDO 190 224	2 x 24 watt T5	1800
KDO 190 228	2 x 28 watt T5	2800
KDO 190 235	2 x 35 watt T5	3400
KDO 190 239	2 x 39 watt T5	2200
KDO 190 249	2 x 49 watt T5	3400
KDO 190 254	2 x 54 watt T5	2800

ADD SUFFIX

/LV for louvre option
/SL for spread lens option
/EM for integral emergency version
/AL for anodised aluminium finish
/AW for white anodised aluminium finish

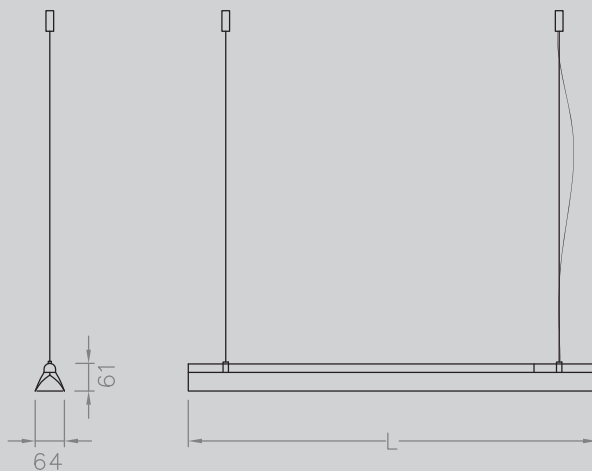

DIMENSIONS

MOUNTING
WIRE SUSPENSION
1500mm AS STANDARD

LAMPS
T5

DISTRIBUTION

PENDANT
KODU

DETAIL

IP RATING **_20**
WEIGHT [KG] **_1.5/LINEAR METRE**

CE