

STEED

An individual or continuous recessed luminaire with halogen downlight options.

SPECIFICATION
ALUMINIUM HOUSING
ALUMINIUM LOUVRE
ACRYLIC SPREAD LENS



FINISH
ANODISED ALUMINIUM
ANODISED WHITE

REFERENCE	LAMPS	LENGTH (mm)
SINGLE LENGTH MODULE WITH ACRYLIC LENS		
STE 437 128	1 x 28 watt T5	1210
STE 437 135	1 x 35 watt T5	1510
STE 437 149	1 x 49 watt T5	1510
STE 437 154	1 x 54 watt T5	1210

DOUBLE LENGTH MODULE WITH ACRYLIC LENS		
STE 437 228	2 x 28 watt T5	2250
STE 437 235	2 x 35 watt T5	2850
STE 437 249	2 x 49 watt T5	2850
STE 437 254	2 x 54 watt T5	2250

SINGLE LENGTH MODULE WITH LOUVRE		
STE 438 128	1 x 28 watt T5	1210
STE 438 135	1 x 35 watt T5	1510
STE 438 149	1 x 49 watt T5	1510
STE 438 154	1 x 54 watt T5	1210

DOUBLE LENGTH MODULE WITH LOUVRE		
STE 438 228	2 x 28 watt T5	2400
STE 438 235	2 x 35 watt T5	3000
STE 438 249	2 x 49 watt T5	3000
STE 438 254	2 x 54 watt T5	2400


MODULES WITH LENS AND HALOGEN DOWNLIGHTS		
STE 439 1282	1 x 28 watt T5 + 2 x MR16	1555
STE 439 1352	1 x 35 watt T5 + 2 x MR16	1855
STE 439 1492	1 x 49 watt T5 + 2 x MR16	1855
STE 439 1542	1 x 54 watt T5 + 2 x MR16	1555
STE 439 2283	2 x 28 watt T5 + 3 x MR16	2890
STE 439 2353	2 x 35 watt T5 + 3 x MR16	3490
STE 439 2493	2 x 49 watt T5 + 3 x MR16	3490
STE 439 2543	2 x 54 watt T5 + 3 x MR16	2890

MODULES WITH LOUVRE AND HALOGEN DOWNLIGHTS		
STE 440 1282	1 x 28 watt T5 + 2 x MR16	1555
STE 440 1352	1 x 35 watt T5 + 2 x MR16	1855
STE 440 1492	1 x 49 watt T5 + 2 x MR16	1855
STE 440 1542	1 x 54 watt T5 + 2 x MR16	1555
STE 440 2283	2 x 28 watt T5 + 3 x MR16	2890
STE 440 2353	2 x 35 watt T5 + 3 x MR16	3490
STE 440 2493	2 x 49 watt T5 + 3 x MR16	3490
STE 440 2543	2 x 54 watt T5 + 3 x MR16	2890



ADD SUFFIX

/GR for grey anodised aluminium
/WH for white anodised aluminium

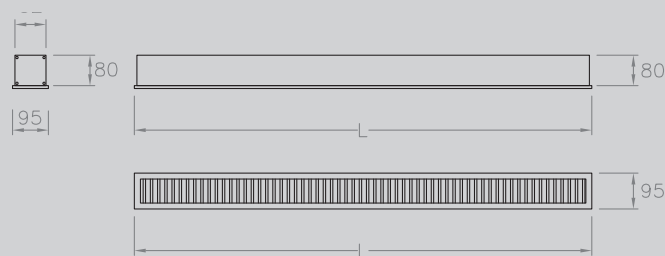

DIMENSIONS

MOUNTING
UNIVERSAL MOUNTING BRACKET

LAMPS
T5 / MR16

DISTRIBUTION

RECESSED
STEED

DETAIL

IP RATING **_20**
WEIGHT [KG] **_2/METRE**

CE