

# ALMELO

A square downlight with LEDs.

**SPECIFICATION**  
DIE-CAST ALUMINIUM HOUSING  
PLUG AND SOCKET ARRANGEMENT  
BETWEEN DRIVER AND LED  
MEDIUM BEAM ANGLE


**FINISH**  
WHITE  
BLACK



REFERENCE	LAMPS	COLOUR
WHITE		
ALM 249 WWLED	4 x 3 watt LED	WARM WHITE
ALM 249 CWLED	4 x 3 watt LED	COOL WHITE
COLOURS		
ALM250 RDLED	4 x 1 watt LED	RED
ALM250 GRLED	4 x 1 watt LED	GREEN
ALM250 BLLED	4 x 1 watt LED	BLUE
ALM250 AMLED	4 x 1 watt LED	AMBER

IP65 version available to special order.  
Medium beam supplied as standard

ADD SUFFIX      /N for narrow beam  
                         /W for wide beam

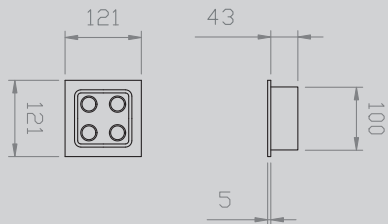

DIMENSIONS

MOUNTING  
SPRING CLIP  
MOUNTING MECHANISM



LAMPS  
LED

DISTRIBUTION

RECESSED  
ALMELO

DETAIL

IP RATING **\_20**  
WEIGHT [KG] **\_1**

CE