



SPECIFICATION
 ALUMINIUM HOUSING
 ACRYLIC SPREAD LENS
 OPTIONAL GLASS SHADE ELEMENT

FINISH
 ANODISED ALUMINIUM
 ANODISED WHITE

DORION WALL




A T5 wall-mounted luminaire with linear spread lens.
 Available in single and double lengths.

REFERENCE	LAMPS	LENGTH (mm)
SINGLE LENGTH STANDARD VERSIONS		
DOW 412 214	2 x 14 watt T5	605
DOW 412 224	2 x 24 watt T5	605
DOW 412 221	2 x 21 watt T5	905
DOW 412 228	2 x 28 watt T5	1205
DOW 412 235	2 x 35 watt T5	1505
DOW 412 239	2 x 39 watt T5	905
DOW 412 249	2 x 49 watt T5	1505
DOW 412 254	2 x 54 watt T5	1205

DOUBLE LENGTH STANDARD VERSIONS		
DOW 412 2228	2 x 2 x 28 watt T5	2400
DOW 412 2235	2 x 2 x 35 watt T5	3000
DOW 412 2249	2 x 2 x 49 watt T5	3000
DOW 412 2254	2 x 2 x 54 watt T5	2400

GLASS SHIELD VERSIONS		
DOW 414 214	2 x 14 watt T5	660
DOW 414 224	2 x 24 watt T5	660
DOW 414 228	2 x 28 watt T5	1260
DOW 414 254	2 x 54 watt T5	1260

ADD SUFFIX /EM for integral emergency version
 /AL for anodised aluminium finish
 /AW for white anodised aluminium finish

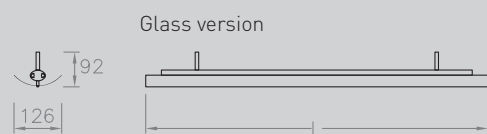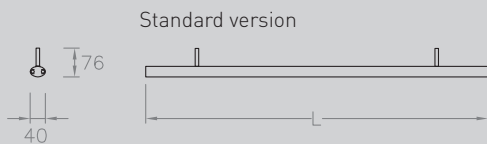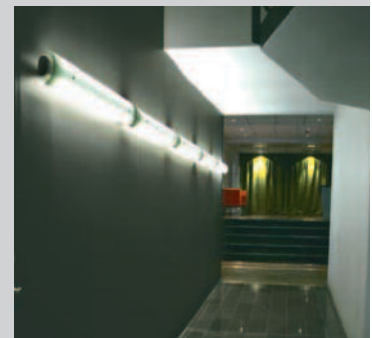

DIMENSIONS

MOUNTING
 WALL BRACKETS

LAMPS
 T5

DISTRIBUTION

WALL
 DORION WALL

DETAIL

IP RATING **_20**
 WEIGHT [KG] **_2.5/METRE**

CE