

SPECIFICATION
STEEL HOUSING



FINISH
RAL 9010
RAL 9006

MINIBAT

T5 slimline batten fitting offered in single or twin lamp formats.

REFERENCE	LAMPS	LENGTH (mm)
SINGLE LAMP VERSION		
MBT 940 114	1 x 14 watt T5	575
MBT 940 121	1 x 21 watt T5	875
MBT 940 124	1 x 24 watt T5	575
MBT 940 128	1 x 28 watt T5	1175
MBT 940 135	1 x 35 watt T5	1475
MBT 940 139	1 x 39 watt T5	875
MBT 940 149	1 x 49 watt T5	1475
MBT 940 154	1 x 54 watt T5	1175
MBT 940 180	1 x 80 watt T5	1475


TWIN LAMP VERSION		
MBT 940 214	2 x 14 watt T5	575
MBT 940 221	2 x 21 watt T5	875
MBT 940 224	2 x 24 watt T5	575
MBT 940 228	2 x 28 watt T5	1175
MBT 940 235	2 x 35 watt T5	1475
MBT 940 239	2 x 39 watt T5	875
MBT 940 249	2 x 49 watt T5	1475
MBT 940 254	2 x 54 watt T5	1175
MBT 940 280	2 x 80 watt T5	1475

ADD SUFFIX


- /IC for in-line connectors
- /FC for flying lead connectors
- /DIF with diffuser
- /DSI for Digital dimming
- /AN for analogue dimming
- /DALI for DALI dimming



with diffuser

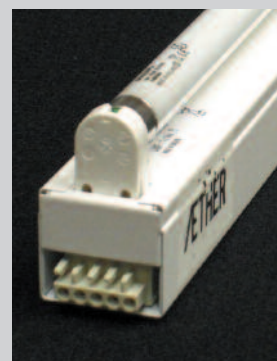

in-line connectors

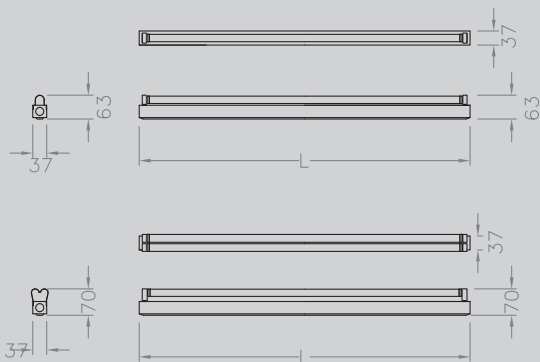

DIMENSIONS

MOUNTING
DIRECT FIX

LAMPS
T5

DISTRIBUTION

BUILDING BLOCKS
MINIBAT

DETAIL

IP RATING **_20**
WEIGHT [KG] **_2-4**

CE