





SPECIFICATION
 STEEL HOUSING
 DEEP-DYED POLYCARBONATE
 OVERSLEEVES

FINISH
 ANODISED ALUMINIUM

TRUE COLOURS

Two or three lamp colour changing or dynamic white batten for integration within architectural elements.


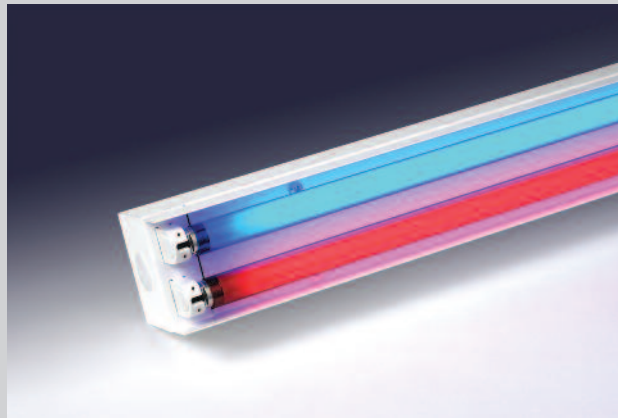
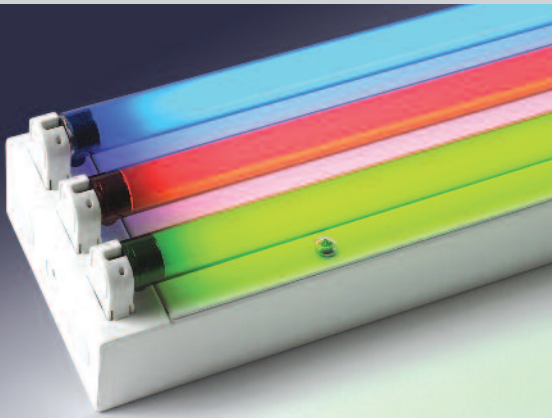


REFERENCE	LAMP CONFIGURATION	LENGTH (mm)
TWO LAMP		
TCL 901 214	2 x 14 watt	600
TCL 901 221	2 x 21 watt	900
TCL 901 228	2 x 28 watt	1200
TCL 901 235	2 x 35 watt	1500

ADD SUFFIX /AN for analogue dimming control gear
 /DSI for digital dimming control gear
 /DALI for DALI dimming control gear
 /DW for Dynamic white (3000, 4000 and 6500K lamps)
 DMX—DSI/DALI CONVERTOR - ORDER CODE DMX 901 DSI

STATE COLOURS FOR BOTH LAMPS

THREE LAMP		
TCL 901 314	3 x 14 watt (RGB)	600
TCL 901 321	3 x 21 watt (RGB)	900
TCL 901 328	3 x 28 watt (RGB)	1200
TCL 901 335	3 x 35 watt (RGB)	1500

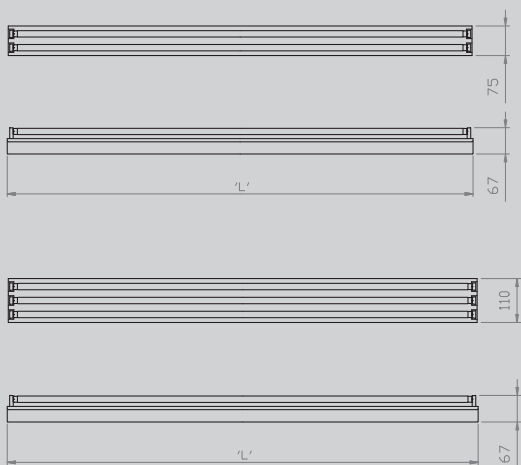

DIMENSIONS

MOUNTING
 DIRECT FIX

LAMPS
 T5

DISTRIBUTION

BUILDING BLOCKS
 TRUE COLOURS

DETAIL
 IP RATING **_20**
 WEIGHT [KG] **_5**

