

The background of the entire image is a stylized Union Jack flag. The white areas of the flag are solid white, while the blue areas are filled with a fine, repeating pattern of small, light blue diamonds. The pattern is most visible in the blue squares and is less distinct in the blue diagonal stripes.

ELEMENTS
BY AETHER LIGHTING



**Affordable
and Reliable
Interior Lighting**

Contents




WASH
Page 3



RING
Page 4



DISC
Page 5



LINER
Page 6



GLANCE
Page 7



ROTUNDA
Page 8




ARCOLA 195
Page 9



ARCOLA 85
Page 10



SHALLOW
Page 11



SHALLOW MINI
Page 12



GRID
Page 13



GRID WING
Page 14



VAP
Page 15



BATT
Page 16

WASH


LED WALL LUMINAIRE

| PRODUCT CODE | LUMENS | LOAD |
|--------------|--------|------|
|--------------|--------|------|

| | | |
|--------------|-----|----|
| WASH/9/4000K | 825 | 9W |
|--------------|-----|----|

| | | |
|---------------|------|-----|
| WASH/16/4000K | 1500 | 16W |
|---------------|------|-----|

| | | |
|---------------|------|-----|
| WASH/24/4000K | 2250 | 24W |
|---------------|------|-----|

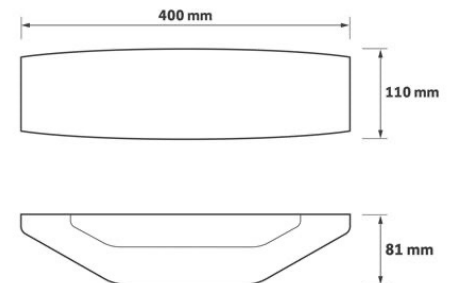

A decorative wall mounted LED luminaire with bidirectional light output and opal diffusers for homogenous illumination.

- Dims:** 400mm x 110mm x 81mm
- Mounting:** Wall mounted. Vertical or horizontal mounting
- Control Gear:** Various dimming options available. /DIM
- Finish:** White or Black paint finish /W, /B. Other colours and specifications available on request.

RING

LED RING PENDANT

PRODUCT CODE

LUMENS

LOAD

RING/47/4000K

2625

47W

RING/86/4000K

5025

86W

Other outputs, options and accessories available.



A suspended LED ring luminaire
with an opal acrylic diffuser.

Dims: ø600mm x 105mm / ø1200mm x 105. Other diameters available on request.

Mounting: Suspended via adjustable wire suspensions

Control Gear: Various dimming options available. /DIM

Finish: White, Black or Grey paint finish /W, /B, /G. Other colours and specifications available on request.

DISC

LED DISC PENDANT

PRODUCT CODE

LUMENS

LOAD

DISC/54/4000K

4775

54W

DISC/137/4000K

15700

137W

Other outputs, options and accessories available.



A suspended LED disc luminaire
with an opal diffuser.

Dims: ø600mm x 105mm / ø1200mm x 105. Other diameters available on request.

Mounting: Suspended via adjustable wire suspensions.

Control Gear: Various dimming options available. /DIM

Finish: White, Black or Grey paint finish /W, /B, /G. Other colours and specifications available on request.

LINER

LINEAR LED LUMINAIRE

PRODUCT CODE

LUMENS

LIN/850/4000K

1825


LIN/1200/4000K

2725

LIN/1500/4000K

3325

Other outputs, options and accessories available.

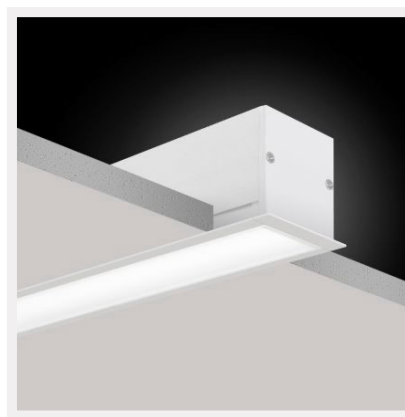

A versatile linear LED luminaire with various options and accessories available. Luminaire is available in surface mounted, suspended, or recessed versions and is suitable for use as a single luminaire or as a continuous system to provide various length runs. LINER Luminaire is complete as standard with an opal TP(a) diffuser. A Low Glare prismatic diffuser option is available for office and LG7 compliance /LG.

| | |
|----------------------|--|
| Dims: | Single lengths: 850mm/1200mm/1500mm. Various length continuous runs available. |
| Mounting: | Surface mounted /SM. Suspended via wire suspensions /SUS. Recessed /REC |
| Control Gear: | Tridonic driver. Various dimming options available. /DIM Available with 3 hour emergency /EM |
| Finish: | White, Black or Grey paint finish /W, /B, /G. Other colours and specifications available on request. |

GLANCE

LED WALL LUMINAIRE FOR STAIRWAYS

PRODUCT CODE


GLA/19/4000K

LUMENS

1800

LOAD

19W

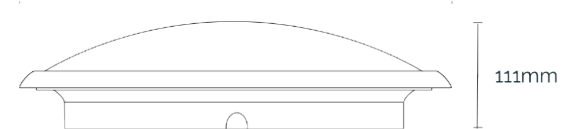

A stairway LED wall luminaire with a unique LED gear tray arrangement for stairway applications - providing directional light onto stair treads whilst maintaining a uniform illuminated appearance. Luminaire complete with polycarbonate body and diffuser.

Dims: 430mm x 110mm

Mounting: Wall mounted

Control Gear: Tridonic driver. Various dimming options available. /DIM.
Available with 3 hour emergency /EM



Finish: White finish as standard.
Other colours and various decorative trim options available /TRIM. Halo effect versions available /HALO

ROTUNDA

LED DOWNLIGHT

| PRODUCT CODE | LUMENS | LOAD |
|--------------|--------|------|
| ROT/8/4000K | 1075 | 8W |
| ROT/14/4000K | 1800 | 14W |
| ROT/19/4000K | 2450 | 19W |
| ROT/28/4000K | 3275 | 28W |

Other outputs, options and accessories available.

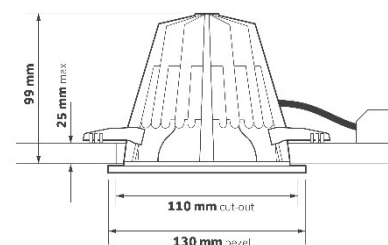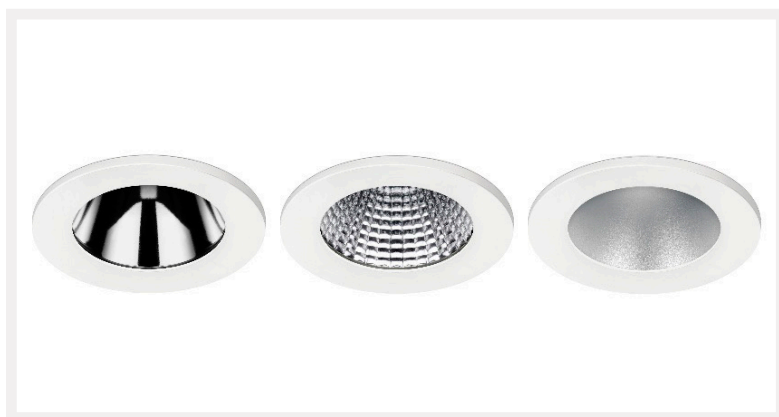

A recessed LED downlight luminaire suitable for a wide range of applications with a range of options and accessories Including decorative and IP65 bezel options.


| | |
|----------------------|--|
| Dims: | 130mm x 99mm |
| Mounting: | Ceiling recessed. Plaster in option available. /PI |
| Control Gear: | Remote Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC |
| Finish: | Bezel and finish options available including – Drop halo, Snoot, IP65, IP54 glass and Hi-light options |

ARCOLA 195

LED DOWNLIGHT

| PRODUCT CODE | LUMENS | LOAD |
|-------------------|--------|-------|
| ARC195/9.5/4000K | 1100 | 9.5W |
| ARC195/17.5/4000K | 1900 | 17.5W |
| ARC195/30.5/4000K | 2925 | 30.5W |
| ARC195/46.5/4000K | 4550 | 46.5W |

Available in - /3000K & /4000K.
Various options and accessories available.

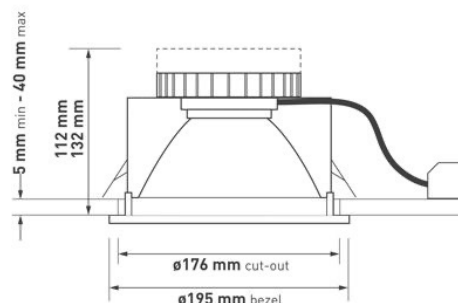

A high-performance recessed LED downlight luminaire suitable for a wide range of applications with a die-cast twist and lock bezel feature for interchangeable accessories, including decorative and IP rated bezel options.

Dims: 195mm x 112/132mm

Mounting: Ceiling recessed

Control Gear: Philips driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC

Finish: Various bezel and finish options available including – Drop halo, Snoot, IP65, IP54 glass and Hi-light options

ARCOLA 85

MINI IP65 LED DOWNLIGHT

PRODUCT CODE

LUMENS


LOAD

ARC85/8/4000K

775

8W

Available in - /3000K & /4000K

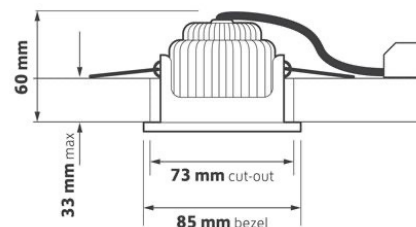

A recessed fire rated FR90, IP65 mini LED downlight luminaire suitable for a wide range of applications.

Dims: 85mm x 60mm

Mounting: Ceiling recessed. Supplied with IP ceiling gasket.

Control Gear: Remote Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC


Finish: White, Black and Brushed bezel finish options available /W, /B, /BRS.

SHALLOW

LED DOWNLIGHT

| PRODUCT CODE | LUMENS | LOAD |
|--------------|--------|------|
| SHA/T1/4000K | 1200 | 11W |
| SHA/21/4000K | 2275 | 21W |

Switchable 3 x CCT - 3000K, 4000K, 5500K

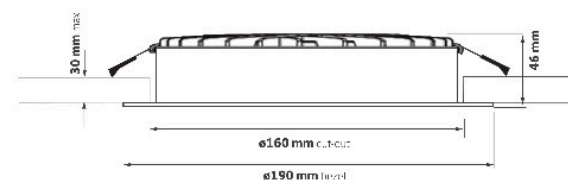

A shallow depth recessed commercial LED downlight luminaire with an opal polycarbonate diffuser and RAL9016 bezel. IP54 as standard.

| | |
|----------------------|---|
| Dims: | 190mm x 46mm |
| Mounting: | Ceiling recessed |
| Control Gear: | Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC |
| Finish: | RAL9016 bezel |

SHALLOW MINI

LED DOWNLIGHT

PRODUCT CODE

SHAM/9/4000K


LUMENS

850

LOAD

9W

Switchable 3 x CCT - 3000K, 4000K, 5500K

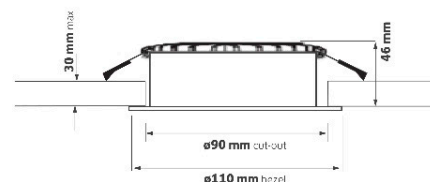

A shallow depth recessed mini commercial LED downlight luminaire with an opal polycarbonate diffuser and RAL9016 bezel. IP54 as standard.

Dims: 110mm x 46mm

Mounting: Ceiling recessed

Control Gear: Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC

Finish: RAL9016 bezel

GRID

LED PANEL

PRODUCT CODE

LUMENS

LOAD

GRD/26/4000K

3100


26W

GRD/34.5/4000K

3900

34.5W

Available in - /3000K & /4000K.
Other outputs, options and accessories available.

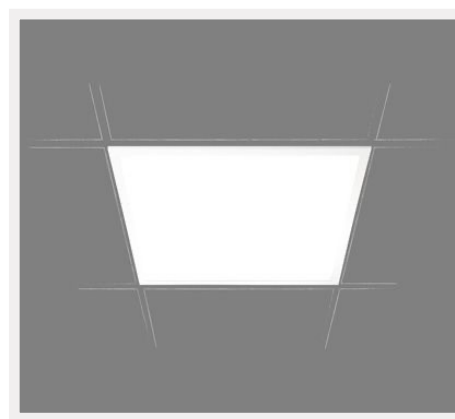

An ultra slim depth 600 x 600 lay-in LED panel.
Low Glare UGR <19 for LG7 compliance.
Part L and ETL compliant efficacies.
Self-extinguishing TP(a) diffuser option available /TPA.

Dims: 596mm x 595mm x 8.5mm

Mounting: Lay-in ceiling recessed. Plasterboard mounting kit option available /PMK.
Suspension Kit option available /SUS. Surface mount frame option available /SM

Control Gear: Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC


Finish: White finish

GRID WING

LED MODULAR

| PRODUCT CODE | LUMENS | LOAD |
|-----------------|--------|-------|
| GRDW/31.5/4000K | 3200 | 31.5W |
| GRDW/32/4000K | 3575 | 32W |
| GRDW/46/4000K | 5125 | 46W |
| GRDW/52/TW | 3875 | 52W |

Available in - /3000K & /4000K
and 3000K- 6000K Tunable white /TW.
Other outputs, options and accessories available.

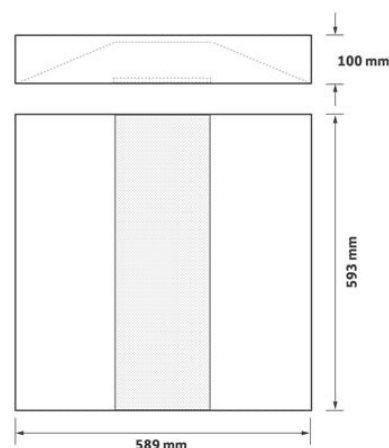

A 600 x 600 LED modular with micro prismatic central diffuser which is packed with features and options to provide a safe and comfortable working environment.


| | |
|----------------------|--|
| Dims: | 593mm x 589mm x 100mm |
| Mounting: | Ceiling recessed. Plasterboard mounting kit option available /PMK. Suspension Kit option available /SUS. Surface mount frame option available /SM |
| Control Gear: | Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC |
| Finish: | White finish |

VAP

IP65 LED BATTEN LUMINAIRE

| PRODUCT CODE | LENGTH | LUMENS | LOAD |
|--------------|--------|--------|------|
| VAP/16/4000K | 1200mm | 2325 | 16W |
| VAP/30/4000K | 1200mm | 4400 | 30W |
| VAP/19/4000K | 1500mm | 2900 | 19W |
| VAP/36/4000K | 1500mm | 5500 | 36W |

Available in - /3000K & /4000K
Other outputs, options and accessories available.

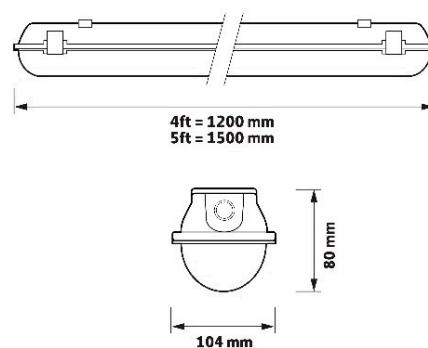

IP65 anti-corrosive LED batten with a robust injection moulded polycarbonate body. Supplied in 4ft and 5ft versions. Luminaire fitted with an opal light pipe for homogeneous output and a clear vapour proof, high impact diffuser. Quick release flush mounted fixing clips. IK10.

| | |
|----------------------|--|
| Dims: | W: 104mm D: 80mm L: 1200mm/1500mm |
| Mounting: | Surface mounted. Corner mounting kit /CMK 1.5m suspension kit /SUS |
| Control Gear: | Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM |
| Finish: | Grey. Stainless steel clips available /SSC |

BATT

LED BATTEN

PRODUCT CODE


BAT/26/4000K

LUMENS

3300

LOAD

26.6W

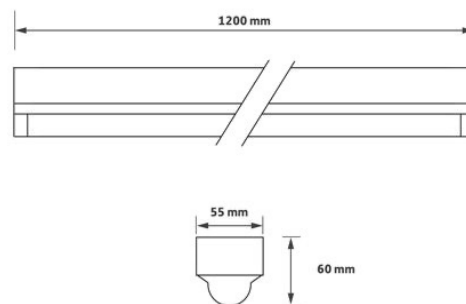

A LED batten with an aluminium body and integral gear tray complete with opal diffuser.

Dims: W: 55mm D: 60mm L: 1200mm

Mounting: Surface mounted

Control Gear: Tridonic driver. Various dimming options available. /DIM.
Available with 3 hour emergency /EM

Finish: White Paint finish.



T: 020 8254 0096 | E: ELEMENTS@AETHERLIGHTING.COM
A: 67 SOUTH STREET, EPSOM, SURREY, KT18 7PY

www.aetherlighting.com