


CITADEL

Slim-line curved profile LED luminaire

PRODUCT CODE	LUMENS	LENGTH (L)	LOAD
CIT/2/2250	2250	600mm	18W
CIT/2/2450	2450	600mm	20.5W
CIT/2/2900	2900	600mm	25W
CIT/4/4500	4500	1200mm	35W
CIT/4/4900	4900	1200mm	39W
CIT/4/5800	5800	1200mm	48W

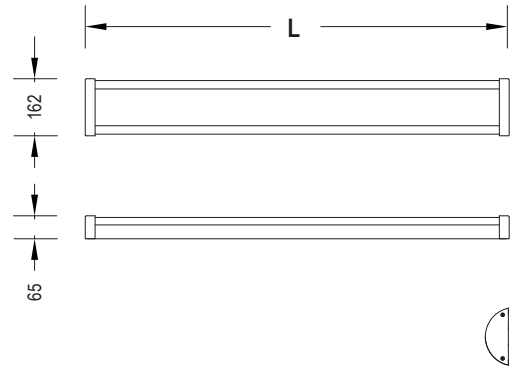

Linear LED fitting with a slim-line curved profile capable of continuous mounting (available with optional cable trunking system).

Body in extruded aluminium.

Machined aluminium end caps secured by anti-tamper fixings.

3mm opal polycarbonate control lens designed to achieve superior optical performance.

2250, 2450 & 2900lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

4500, 4900 & 5800lm are supplied set to ordered level but version for on-site switchable output is available - add suffix “ADJ”.

CCT:	4000K
Finish:	Painted Smooth White
IP:	65
IK:	20

Other colours and technical modifications available.