


TABOR45

Strong & durable LED angled luminaire

PRODUCT CODE	LUMENS	LENGTH (L)	LOAD
TAB45/2/2250	2250	620mm	18W
TAB45/2/2450	2450	620mm	20.5W
TAB45/2/2900	2900	620mm	25W
TAB45/4/4500	4500	1200mm	35W
TAB45/4/4900	4900	1200mm	39W
TAB45/4/5800	5800	1200mm	48W

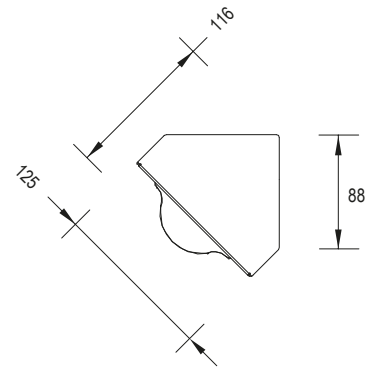

The 'tough brother' of the Forum, designed for installations where severe or prolonged attack may occur.

Angled body in zinc coated steel.

3mm opal polycarbonate diffuser secured by anti-tamper fixings.

620mm version is provided utilising a flat opal polycarbonate panel.

2250, 2450 & 2900lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

4500, 4900 & 5800lm are supplied set to ordered level but version for on-site switchable output is available - add suffix “ADJ”.

CCT:	4000K
Finish:	Painted Textured Black
IP:	65
IK:	18



Other colours and technical modifications available.
Anti-ligature as standard when correctly cornice mounted.