

ELEMENTS - ROTUNDA

AETHER ROTUNDA LED downlight

SPECIFICATION

AETHER REFERENCE: ROT

DESCRIPTION AND HOUSING

A recessed LED downlight luminaire suitable for a wide range of applications with a range of options and accessories Including decorative and IP65 bezel options.

DIMENSIONS

130mm x 99mm

LIGHT SOURCE

8 W - 1075 Lumen LED	REF: ROT/8/4000K
14 W - 1800 Lumen LED	REF: ROT/14/4000K
19 W - 2450 Lumen LED	REF: ROT/19/4000K
28 W - 3275Lumen LED	REF: ROT/28/4000K

Available in - /3000K & /4000K Please note: Various options, and accessories available. Please enquire.

MOUNTING

Ceiling recessed. Plaster in option available. /PI

CONTROL GEAR


Remote Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC

FINISH

Various bezel and finish options available including - Drop halo, Snoot, IP65, IP54 glass and Hi-light options. Please enquire.

Data Sheet

ROTUNDA LED Downlight

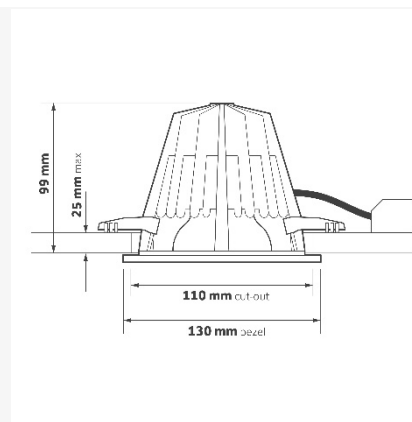

ELEMENTS 
BY AETHER LIGHTING

M: 07827 233720 | **T:** 020 8254 0094 | **E:** rob.cumper@aetherlighting.com
A: 67 SOUTH STREET, EPSOM, SURREY KT18 7PY

www.aetherlighting.com

This document and the information contained herein, may not be copied, used or disclosed in whole or in part, without the written permission of Aether Lighting Ltd. ©2020.